# Contempra COHS6032SKTF

60"x 32" x 20"

## HYDRO SILVER SERIES

Tour Massage

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s):	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	38-56

PRODUCT NUMBER: COHS6032SKTF-LH & COHS6032SKTF-RH

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



Contempra



### STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS

#### **JETS**

9 Water Jets
Tri-Zone Back Systems 3 Jets
Ultra Flow Jets

O
Micro Flow Jets

•

#### **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

### **CONTROLS**

Air Switch On/Off Control(s)

#### PURITY

HydroClean Water Purity System HydroCleanse

#### STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Skirt with Magnetic Access Panel

## **REQUIREMENTS**

Pump Locations: Select 1
Electrical: one 115v GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable legs to sub floor. CUT OUT DIMENSIONS:

OVALS: A template will be provided


**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY




## **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

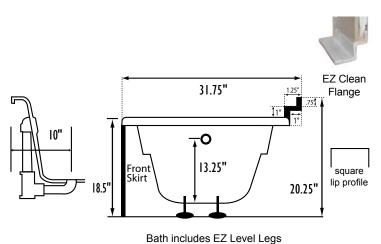





Backrest angle

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.