2 Person Deep Soaker CS5444 54" x 44" x 35"

PRODUCT NUMBER: DSCS5444

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	185 lbs
Gallons to Operate	70-95
ELECTRICAL SPECIFICATIO	NS
Motor/Pump	(2) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit

STANDARD FEATURES & ACCESSORIES for COMBINATION SILVER SERIES BATHS _

JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets -Micro Flow Jets • Classic Air Jets O

PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY HydroClean Water Purity System HydroCleanse

COMBINATION SILVER SERIES

Jet & Control placement may vary

r Health ... Our F

BATHERS: 2		
INSTALLATION		
•	DECK (D)	
•	UNDER MOUNT (U)	
	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	



PEDESTAL (P) **R SERIES BATHS** STANDARD ACCESSORIES Mood Light Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome Polyne, Cupbing Billow

Deluxe Cushion Pillow EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

REQUIREMENTS


Pump Locations: Select 2 Electrical: two 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole.

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

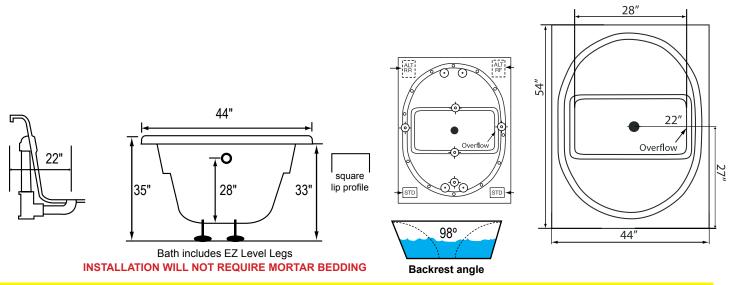

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.