2 Person Deep Soaker DSTO5444 54" x 44" x 35"

TUB (ONLY	SERIES
-------	------	--------



TECHNICAL SPECIFICATIONS		
Drain	Side drain	
Pump Location(s): N/A	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	185 lbs	
Gallons to Operate	70-95	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	N/A	
Inline Stainless Steel Heater	N/A	

BATHERS: 2		
INSTALLATION		
•	DECK (D)	
•	UNDER MOUNT (U)	
	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	



STANDARD FEATURES & ACCESSORIES for TUB ONLY SERIES

STANDARD ACCESSORIES EZ level Adjustable Legs

REQUIREMENTS

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

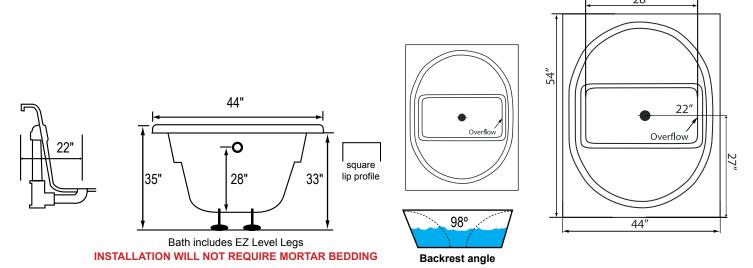

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.