# Eclipse ECAS6642 66" x 42" x 23"

## **AIR SILVER SERIES**

Jet & Control placement may vary

Hydro	Massage
Your Healti	1 Our Passion

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Configuration: Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	145 lbs	
Gallons to Operate	50-65	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(1) 115v 20AMP GFCI Circuits	

BATHERS: 1	
INSTALLATION	
•	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



# STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS \_

#### **JETS**

12 Classic Air Jets Sidewall O

#### **PUMPS**

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

#### **CONTROLS**

Air Switch On/Off Control(s)
Automatic Purge & Dry Cycle Control

#### **PURITY**

HydroCleanse

#### STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

# **REQUIREMENTS**

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuit

Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable legs to sub floor. CUT OUT DIMENSIONS:

**OVALS:** A template will be provided


**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY




### **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

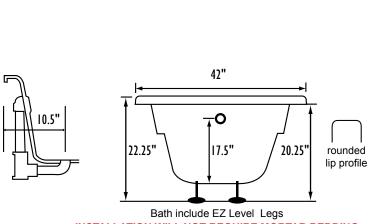

STD. STD.

Backrest angle



INSTALLATION WILL NOT REQUIRE MORTAR BEDDING

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.