Escape ESCS6031SKTF 60" x 31-38" x 22"

PRODUCT NUMBER: ESCS6031SKTF-LH & ESCS6031SKTF-RH

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Configuration: Select 2	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	140 lbs	
Gallons to Operate	33-51	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(2) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit	

STANDARD FEATURES & ACCESSORIES for COMBINATION SILVER SERIES BATHS

JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets -Micro Flow Jets (•) Classic Air Jets O

PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroClean Water Purity System HydroCleanse

COMBINATION SILVER SERIES



BATHERS: 1		Jet & Control
INSTALLATION		placement may vary
	DECK (D)	
	UNDER MOUNT (U)	
•	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	Curved Skirt
	PEDESTAL (P)	
		-







STANDARD ACCESSORIES

Mood Light Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel,

Oil Rubbed Bronze, Polished Chrome **Deluxe Cushion Pillow** Integral Tile Flange EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test


REQUIREMENTS

Pump Locations: Select 2 Electrical: two 115v 20amp GFCI Circuits Tub should not be supported by the lip in any way. Leve tub & screw or glue adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC

OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

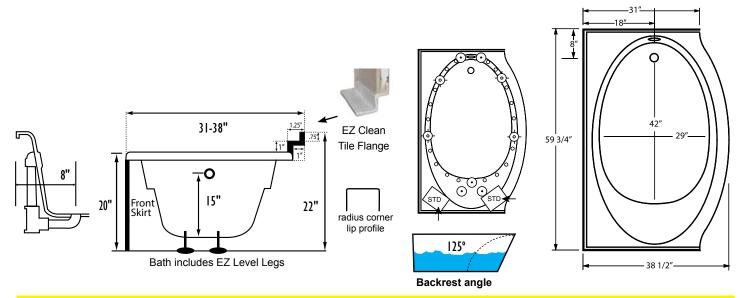

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.