Escape ESTO6634SKTF

66" x 34" x 22"

TUB ONLY SERIES



TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	130 lbs	
Gallons to Operate	45-63	

PRODUCT NUMBER: ESTO6634SKTF-LH & ESTO6634SKTF-RH

ELECTRICAL SPECIFICATIONS	
Motor/Pump	N/A
Inline Stainless Steel Heater	N/A

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)





STANDARD FEATURES & ACCESSORIES for TUB ONLY SERIES

STANDARD ACCESSORIES

Adjustable Leveling Legs Integral Tile Flange

REQUIREMENTS

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole
cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY




OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

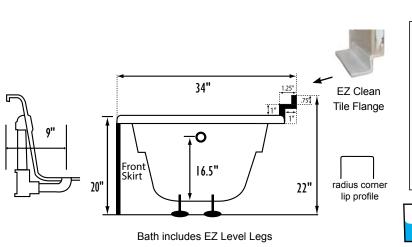





Backrest angle

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.