Escape ESHP6636SKTF 66" x 36" x 22"

PRODUCT NUMBER: ESHP6636SKTF-LH & ESHP6636SKTF-RH

HYDRO PLATINUM SERIES



02

TECHNICAL SPECIFICATIONS			BATHERS: 1		Jet & Control	0
Drain	End drain		INSTALLATION		placement may vary	
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional			DECK (D)		
Bath Weight (empty)	135 lbs			UNDER MOUNT (U)		1.0
Gallons to Operate	57-75		•	ALCOVE (A)	· · · ·	b .
ELECTRICAL SPECIFICATIONS				FREESTANDING (F)	Skirt & Tile Flange	1 A A A A A A A A A A A A A A A A A A A
Motor/Pump	(2) 115v 20AMP GFCI Circuits			CLAWFOOT (L)	 Access Panel with screws & 	
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit			PEDESTAL (P)	caps	

STANDARD FEATURES & ACCESSORIES for HYDRO PLATINUM SERIES BATHS _

JETS

15 Water Jets Back Massage System(s) (7 Jets) Neck Massage Pillow (2 Jets) () Sole Soother Jet(s) 🛞 Accumassage Back, Neck⊕ Ultra Flow Jets -

PUMPS

Two 2.25 Hydropower 3-speed Pump (End Drain Tubs) Quiet Pad Anti-Vibration Mounted Pump

HEATERS

Stainless Steel Electric Heater

CONTROLS

Air Switch On/Off Control(s) For Chromatherapy Lighting 3 Speed Massage: High, Medium or Low

PURITY

HydroClean Water Purity System HydroCleanse

OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

STANDARD ACCESSORIES


,	Grab Bar(s) - 2 on End Drain baths - White, Biscuit, Bone,			
	Brushed Nickel, Polished Chrome			
1	Chromatherapy Lighting			
	Deluxe Cable Drain - White, Biscuit, Bone, Brushed Nickel,			
	Oil Rubbed Bronze, Polished Chrome,			
	Deluxe Cushion Pillow on two person baths			
	Neck Massage Pillow			
	Integral Tile Flange			
	EZ Level Base or Bar(s) on Skirted Tubs			
	FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily)			
;	30 Point Quality Assurance Factory Test			
	PEOLIDEMENTS			

REQUIREMENTS

Pump Locations: Select 2 Electrical: three 115v GFCI Circuits Drain and Grab Bars: Select Color / Finish Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY C(UL) US ANSI



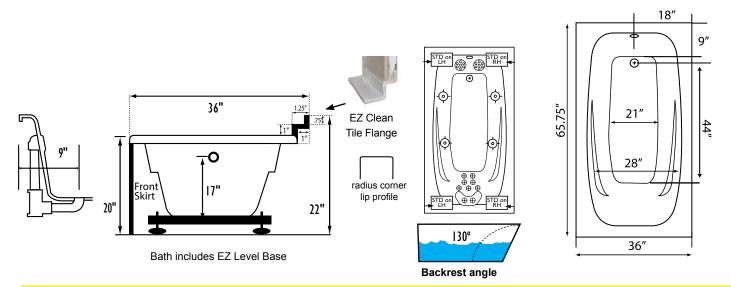

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.

Hydromassage Products LLC • 303-341-1845 | FAX: 303-341-1850 • www.hydromassageproducts.com 7/2023