# Haven HARS6636 66" x 36" x 21"

End drain

145 lbs

43-61

Std. = Standard / Alt LF/RF Optional

(1) 115v 20AMP GFCI Circuits

PRODUCT NUMBER: HARS6636 🚨 🛈

**TECHNICAL SPECIFICATIONS** 

**ELECTRICAL SPECIFICATIONS** 

Pump Location(s): Select 1

Bath Weight (empty)

Gallons to Operate

Motor/Pump

## ReVive Silver Oxygen Soak Series

Halro	Massage
Your Healti	ı Our Passion

BATHERS: 1	
IN:	STALLATION
oxdot	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

0

## **STANDARD FEATURES & ACCESSORIES**

### **PUMPS**

Drain

Oxygen Pressure Pump Quiet Pad Anti-Vibration Mounted Pump

#### **CONTROLS**

Air Switch On/Off Control(s) for Hydro Pump

### **PURITY**

HydroCleanse

## STANDARD ACCESSORIES

EZ Clean Cast Acrylic FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

## **OPTIONAL FEATURES & ACCESSORIES**

Hair and Facial Wand

## **REQUIREMENTS**

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits


Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

**OVALS:** A template will be provided

**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



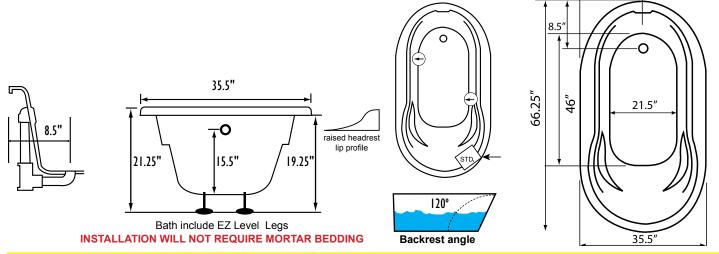

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site.

Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.