Mystique Jr. MJAS6030SKTF 60" x 30" x 20"

PRODUCT NUMBER: MJAS6030SKTF-LH & MJAS6030SKTF-RH

AIR SILVER SERIES



TECHNICAL SPECIFICATIONS				BATHERS: 1	
Drain		End drain	INST		STALLATIC
Pump Location(s): Select 1		Std. = Standard / Alt LF/RF Optional			DECK (D)
Bath Weight (empty)		145 lbs			UNDER MO
Gallons to Opera	ate	27-45	_ [•	ALCOVE (
ELECTRICAL SPECIFICATIONS					FREESTAN
Motor/Pump		(1) 115v 20AMP GFCI Circuits] ٦		CLAWFOO

STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS _

JETS

12 Classic Air Jets Sidewall O

PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroCleanse

STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test Adjustable Leveling legs Integral Tile Flange BATHERS: 1 INSTALLATION DECK (D) UNDER MOUNT (U) ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)

Jet & Control

caps





REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v GFCI Circuit

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:


OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

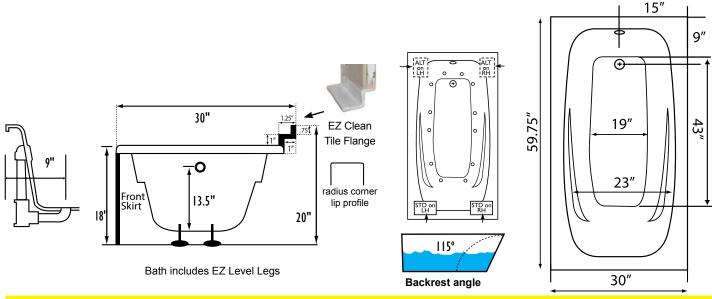

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.