Mystique MYAS7232SKTF 72" x 32" x 22"

AIR SILVER SERIES



TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	175 lbs	
Gallons to Operate	48-67	

Ouii	ono to operate	40 01			
	ELECTRICAL SPECIFICATIONS				
Moto	or/Pump	(1) 115v 20AMP GFCI Circuits			

BATHERS: 1				
INSTALLATION				
	DECK (D)			
	UNDER MOUNT (U)			
•	ALCOVE (A)			
	FREESTANDING (F)			
	CLAWFOOT (L)			
	PEDESTAL (P)			

Jet & Control placement may vary					
. ,					
- /	Acces	le Flan s Pane rews &	į		

caps



STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS

12 Classic Air Jets Sidewall O

PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroCleanse

STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test Adjustable Leveling legs Integral Tile Flange

REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v GFCI Circuit

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (UL) us ANSI



OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

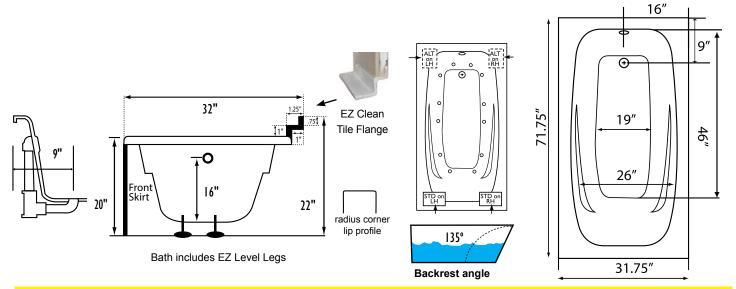

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.