# **Mystique MYHS7232SKTF** 72" x 32" x 22"

**HYDRO SILVER SERIES** 



TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	175 lbs
Gallons to Operate	48-67

PRODUCT NUMBER: MYHS7232SKTF-LH & MYHS7232SKTF-RH

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



caps



### STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS \_

#### **JETS**

9 Water Jets

Tri-Zone Back Systems 3 Jets

Ultra Flow Jets - - - - - - - - - - -

Micro Flow Jets (•)

## **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

#### **CONTROLS**

Air Switch On/Off Control(s)

HydroClean Water Purity System HydroCleanse

#### STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Tile Flange

#### REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** 

**OVALS:** A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC** 

(VL)us ANSI LIMITED LIFETIME WARRANTY

# **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

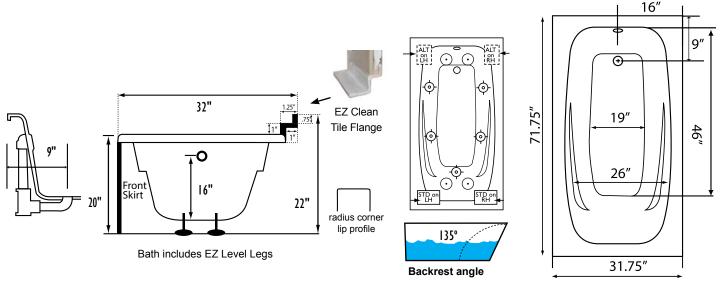

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.