Paradise PASS6060

60" x 60" x 26"

PRODUCT NUMBER: PASS6060 0





| TECHNICAL SPECIFICATIONS | |
|-------------------------------|--------------------------------------|
| Drain | Side drain |
| Pump Location(s): Select 1 | Std. = Standard / Alt LF/RF Optional |
| Bath Weight (empty) | 220 lbs |
| Gallons to Operate | 85-115 |
| ELECTRICAL SPECIFICATIONS | |
| Motor/Pump | (1) 115v 20AMP GFCI Circuits |
| Inline Stainless Steel Heater | N/A |

| BATHERS: 2 | |
|------------------|--|
| INSTALLATION | |
| DECK (D) | |
| UNDER MOUNT (U) | |
| ALCOVE (A) | |
| FREESTANDING (F) | |
| CLAWFOOT (L) | |
| PEDESTAL (P) | |
| | |



STANDARD FEATURES & ACCESSORIES for SOOTHING SOAK SERIES BATHS _

PUMPS

WhisperFlo Heat Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) for Hydro Pump

PURITY

HydroCleanse

STANDARD ACCESSORIES

EZ Clean Cast Acrylic FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ level Adjustable Legs

REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (VL) us ANSI



OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

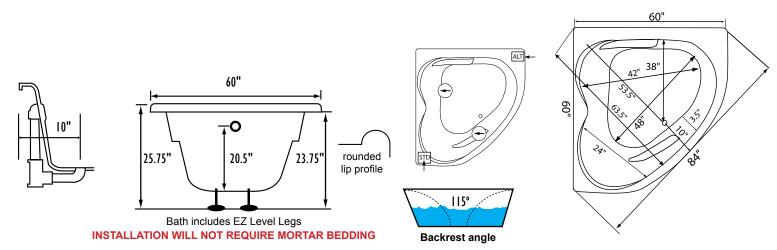

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.