# Serenity SEAS6636 66" x 36" x 22"

PRODUCT NUMBER: SEAS6636 🔔 🕖 🔕

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	145 lbs
Gallons to Operate	48-66
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits

## STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS \_

#### JETS

12 Classic Air Jets Sidewall O

#### PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

#### CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

**PURITY** HydroCleanse

#### STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

# THS \_\_\_\_\_

**BATHERS: 1** 

•

INSTALLATION

DECK (D)

ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)

UNDER MOUNT (U)

Jet & Control placement may vary

**AIR SILVER SERIES** 





### REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuit

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:


OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY

cut out size



#### OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

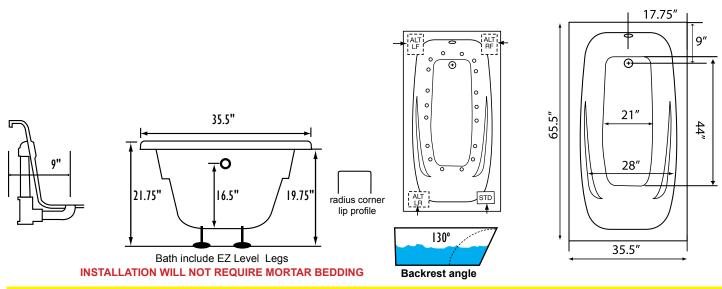

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.