# **Serenity SEHS6636** 66" x 36" x 22"

PRODUCT NUMBER: SEHS6636 . 0 A

**HYDRO SILVER SERIES** 



| TECHNICAL SPECIFICATIONS   |                                      |
|----------------------------|--------------------------------------|
| Drain                      | End drain                            |
| Pump Location(s): Select 1 | Std. = Standard / Alt LF/RF Optional |
| Bath Weight (empty)        | 145 lbs                              |
| Gallons to Operate         | 48-66                                |
| ELECTRICAL SPECIFICATIONS  |                                      |
| Motor/Pump                 | (1) 115y 20AMP GECL Circuits         |

| BATHERS: 1   |                  |
|--------------|------------------|
| INSTALLATION |                  |
| •            | DECK (D)         |
|              | UNDER MOUNT (U)  |
| •            | ALCOVE (A)       |
|              | FREESTANDING (F) |
|              | CLAWFOOT (L)     |
|              | PEDESTAL (P)     |

Jet & Control placement may vary

## STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS \_

(Opt) 115v 20AMP GFCI Circuit

#### **JETS**

9 Water Jets Tri-Zone Back Systems 3 Jets Ultra Flow Jets - - -Micro Flow Jets (•)

Inline Stainless Steel Heater

#### **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

## **CONTROLS**

Air Switch On/Off Control(s)

## **PURITY**

HydroClean Water Purity System HydroCleanse

## STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

# REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

**CUT OUT DIMENSIONS:** 

**OVALS:** A template will be provided

**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole


cut out size


**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY




## **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

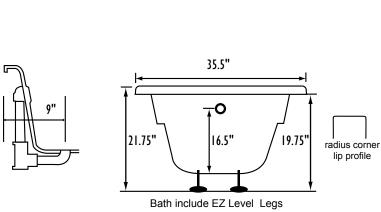



**Backrest angle** 



**INSTALLATION WILL NOT REQUIRE MORTAR BEDDING** 

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.