Serenity HS9440 94" x 40" x 22"

PRODUCT NUMBER: SEHS9440 🔔 🛈 🛕

HYDRO SILVER SERIES

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	215 lbs	
Gallons to Operate	85-110	

ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1	
IN:	STALLATION
•	DECK (D)
	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary



STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS

JETS

9 Water Jets

Tri-Zone Back Systems 3 Jets

Ultra Flow Jets - - -Micro Flow Jets (•)

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

PURITY

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

COLOR

Only Available in White

REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way.

Level tub & screw or glue EZ Level adjustable legs to sub floor.

CUT OUT DIMENSIONS:

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole


cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (UL) US ANSI




OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

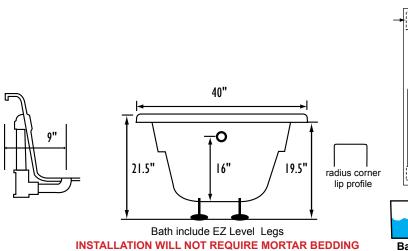





Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.