# Serenity SERS8736 87" x 36" x 21"

PRODUCT NUMBER: SERS8736 🔔 🛈 🚯

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	180 lbs
Gallons to Operate	58-76
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits

# **STANDARD FEATURES & ACCESSORIES**

#### PUMPS

Oxygen Pressure Pump Quiet Pad Anti-Vibration Mounted Pump

#### CONTROLS

Air Switch On/Off Control(s) for Hydro Pump

**PURITY** HydroCleanse

### \_\_\_\_\_

#### STANDARD ACCESSORIES EZ Clean Cast Acrylic

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

# **OPTIONAL FEATURES AND ACCESSORIES**

Hair and Facial Wand

ReVive Silver Oxygen Soak Series

Your Health ... Our Pas

BATHERS: 1	
INSTALLATION	
•	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)




# REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



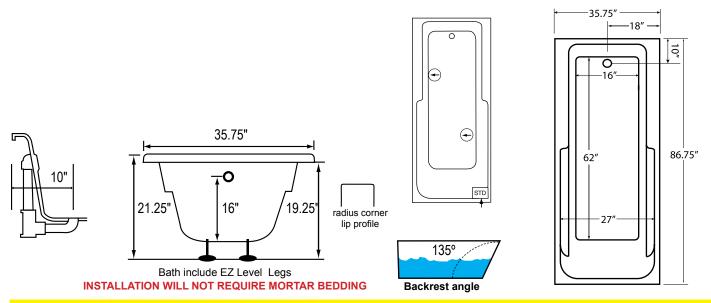

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.