Zen ZEAS6030 60" x 30" x 21"

PRODUCT NUMBER: ZEAS6030 🔔 🛈 🛈

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	145 lbs	
Gallons to Operate	38-56	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(1) 115v 20AMP GFCI Circuits	

STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS _

JETS

12 Classic Air Jets Sidewall O

PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY HydroCleanse

STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

ATHS _____

BATHERS: 1

INS

Jet & Control placement may vary

AIR SILVER SERIES

IALLATION	(
DECK (D)	pl m
UNDER MOUNT (U)	
ALCOVE (A)	
FREESTANDING (F)	
CLAWFOOT (L)	
PEDESTAL (P)	






REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v 20AMP GFCI Circuit Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

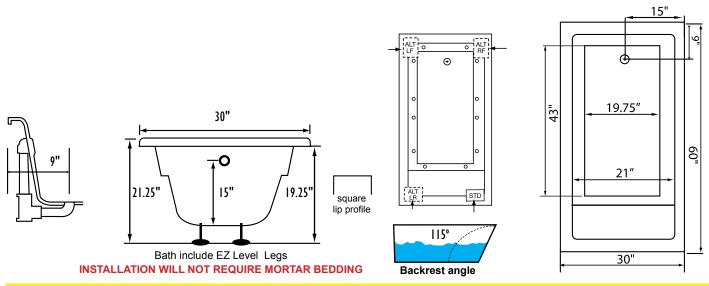

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.