Zen HS6032SKTF

60" x 32" x 23"

HYDRO SILVER SERIES

PRODUCT NUMBER: ZEHS6032SKTF-LH & ZEHS6032SKTF-RH

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	38-56

ELECTRICAL SPECIFICATIONS		
Motor/Pump	(1) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit	

BATHERS: 1	
INSTALLATION	
	DECK (D)
	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)





STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS

JETS

9 Water Jets

Tri-Zone Back Systems 3 Jets

Ultra Flow Jets - - -

Micro Flow Jets (•)

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs Integral Skirt with Magnetic Access Panel

REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY




OPTIONAL FEATURES & ACCESSORIES


(Please type in the box below)

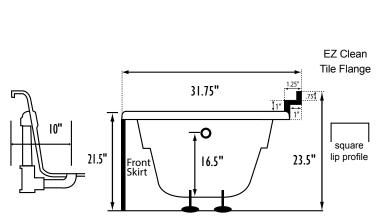

Bath includes EZ Level Legs **INSTALLATION WILL NOT REQUIRE MORTAR BEDDING**







Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.