#### Zen ZECS6034SKTF 60" x 34" x 23"

PRODUCT NUMBER: ZECS6034SKTF-LH & ZECS6034SKTF-RH

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	38-56
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(2) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit

## **STANDARD FEATURES & ACCESSORIES for COMBINATION SILVER SERIES BATHS**

## JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets -Micro Flow Jets (•) Classic Air Jets O

## PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

## CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

## PURITY

HydroClean Water Purity System HydroCleanse

## **COMBINATION SILVER SERIES**



**BATHERS: 1** INSTALLATION DECK (D) UNDER MOUNT (U) ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) Integral Skirt w magnetic PEDESTAL (P) access panel

Jet & Control placement may vary



# STANDARD ACCESSORIES

### Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome **Deluxe Cushion Pillow** 

Integral Skirt with Magnetic Access Panel

EZ Level Adjustable Legs

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test


## REQUIREMENTS

Pump Locations: Select 2 Electrical: two 115v 20amp GFCI Circuits Tub should not be supported by the lip in any way. Leve tub & screw or glue adjustable legs to sub floor. **CUT OUT DIMENSIONS:** 

OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC 

## **OPTIONAL FEATURES & ACCESSORIES** (Please type in the box below)

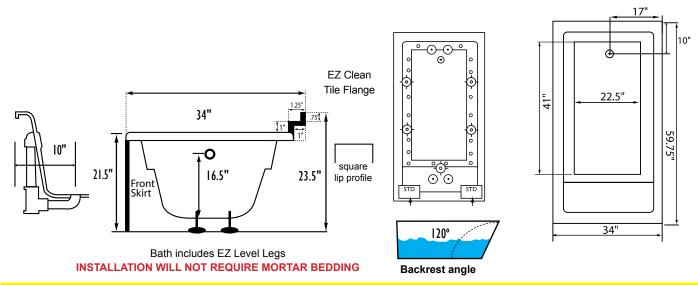

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.