Zen ZEHS6042 60" x 42" x 23"

PRODUCT NUMBER: ZEHS6042 🔔 D 🛈 🔕

TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	155 lbs
Gallons to Operate	57-75
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS _

JETS

9 Water Jets Tri-Zone Back Systems 3 Jets Ultra Flow Jets -Micro Flow Jets •

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS Air Switch On/Off Control(s)

PURITY

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

BATHERS: 1 INSTALLATION DECK (D) UNDER MOUNT (U) ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)

Jet & Control placement may vary

HYDRO SILVER SERIES






REQUIREMENTS

Pump Location(s): Select 1 Electrical: one 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY TEXTURED FLOOR



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

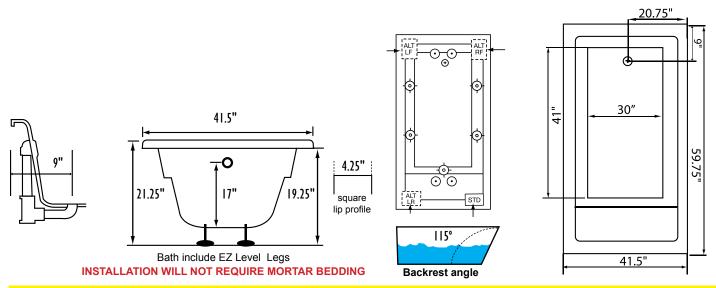

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.