PRODUCT NUMBER: ZEAS6636SD ... D ... D ... **TECHNICAL SPECIFICATIONS** Drain Side drain Std. = Standard / Alt LF/RF Optional Pump Location(s): Select 1

Bath Weight (empty)	165 lbs
Gallons to Operate	53-78
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits

BATHERS: 2	
INSTALLATION	
•	DECK (D)
•	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary

# STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS \_

# **JETS**

12 Classic Air Jets Sidewall O

## **PUMPS**

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

#### CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

#### **PURITY**

HydroCleanse

### STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

# REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuit

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

**CUT OUT DIMENSIONS:** 

**OVALS:** A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole


cut out size


**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY CUL US ANSI **TEXTURED FLOOR** 




# **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

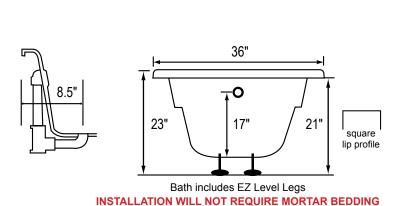





Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site.

Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.