# Zen ZEHS6636SD

66" x 36" x 23"

# HYDRO SILVER SERIES

Jet &

Control placement

may vary



TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	165 lbs
Gallons to Operate	53-78
ELECTRICAL SPECIFICATIONS	
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

## STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS \_

### JETS

9 Water Jets Tri-Zone Back Systems 3 Jets Ultra Flow Jets -Micro Flow Jets (•)

### PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS Air Switch On/Off Control(s)

### PURITY

HydroClean Water Purity System HydroCleanse

### STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

# REQUIREMENTS

**BATHERS: 2** 

•

.

INSTALLATION

DECK (D)

ALCOVE (A) FREESTANDING (F) CLAWFOOT (L) PEDESTAL (P)


UNDER MOUNT (U)

Pump Locations: Select 1 Electrical: one 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY **TEXTURED FLOOR** 



#### **OPTIONAL FEATURES & ACCESSORIES** (Please type in the box below)

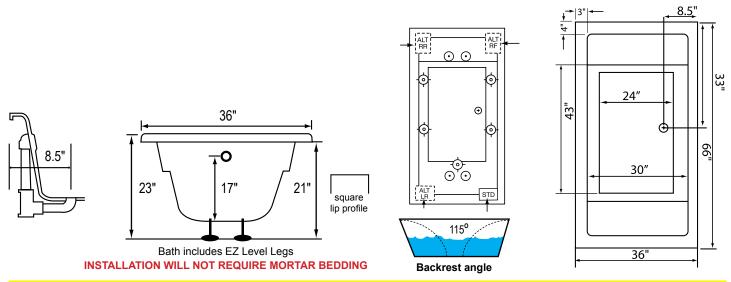

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.