PRODUCT NUMBER: ZEAS6642SD ... D 0 A

TECHNICAL SPECIFICATIONS Drain Side drain Pump Location(s): Select 1 Std. = Standard / Alt LF/RF Optional Bath Weight (empty) 180 lbs Gallons to Operate 57-83 **ELECTRICAL SPECIFICATIONS**

BATHERS: 2	
INSTALLATION	
•	DECK (D)
•	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary

STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS _

(1) 115v 20AMP GFCI Circuits

JETS

Motor/Pump

12 Classic Air Jets Sidewall O

PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroCleanse

STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

REQUIREMENTS

Pump Location(s): Select 1

Electrical: one 115v 20AMP GFCI Circuit

Tub should not be supported by the lip in any way.

Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY (UL) us ANSI




OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

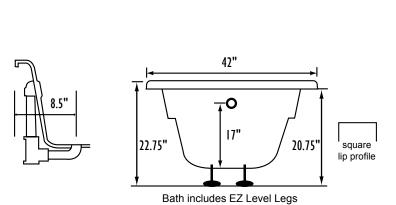





INSTALLATION WILL NOT REQUIRE MORTAR BEDDING

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site.

Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.