Your Health ... Our Passion

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	180 lbs
Gallons to Operate	57-83

PRODUCT NUMBER: ZEHS6642SD ... D 0 A

Bath Weight (empty)	180 lbs	
Gallons to Operate	57-83	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(1) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit	

BATHERS: 2	
INSTALLATION	
•	DECK (D)
•	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)

Jet & Control placement may vary

# STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS \_

#### **JETS**

9 Water Jets
Tri-Zone Back Systems 3 Jets
Ultra Flow Jets

Micro Flow Jets

•

#### **PUMPS**

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

## **CONTROLS**

Air Switch On/Off Control(s)

### **PURITY**

HydroClean Water Purity System HydroCleanse

### STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

## **REQUIREMENTS**

Pump Location(s): Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS:

**OVALS:** A template will be provided

**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole


cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



# **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

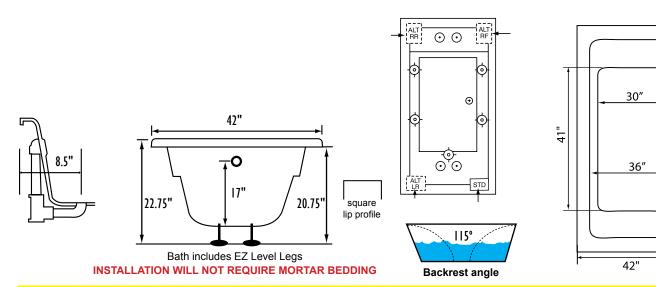

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.