# Zen ZERS7232SD

72" x 32" x 23"

PRODUCT NUMBER: ZERS7232SD ... D O A

Pump Location(s): Select 1 Bath Weight (empty)

Gallons to Operate

Motor/Pump

**TECHNICAL SPECIFICATIONS** 

**ELECTRICAL SPECIFICATIONS** 



Std. = Standard / Alt LF/RF Optional

(1) 115v 20AMP GFCI Circuits

Side drain

185 lbs

67-85

# ReVive Silver Oxygen Soak Series

BATHERS: 2	
INSTALLATION	
•	DECK (D)
•	UNDER MOUNT (U)
•	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



# **STANDARD FEATURES & ACCESSORIES**

#### **PUMPS**

Drain

Oxygen Pressure Pump Quiet Pad Anti-Vibration Mounted Pump

## **CONTROLS**

Air Switch On/Off Control(s) for Hydro Pump

#### STANDARD ACCESSORIES

EZ Clean Cast Acrylic FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ level Adjustable Legs

## **OPTIONAL FEATURES & ACCESSORIES**

Hair and Facial Wand

## **REQUIREMENTS**

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub


#### **CUT OUT DIMENSIONS:**

**OVALS:** A template will be provided


**RECTANGLES:** Subtract 1" to 1.5" from length & width for hole cut out size


**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY




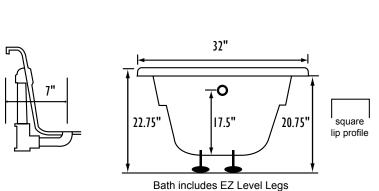

**INSTALLATION WILL NOT REQUIRE MORTAR BEDDING** 







Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site.

Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.