# Zen Oval ZOAS6642 66" x 42" x 24" PRODUCT NUMBER: ZOAS6642 . 0 0

(1) 115v 20AMP GFCI Circuits

**AIR SILVER SERIES** 

Jet & Control

TECHNICAL SPECIFICATIONS		
End drain		
Std. = Standard / Alt LF/RF Optional		
160 lbs		
76-88		
ELECTRICAL SPECIFICATIONS		

BATHERS: 1	
INSTALLATION	
oxdot	DECK (D)
$\lceil \cdot \rceil$	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



## STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS \_

Motor/Pump

12 Classic Air Jets Sidewall O

#### **PUMPS**

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

#### CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

### **PURITY**

HydroCleanse

#### STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

# **REQUIREMENTS**

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuit

Tub should not be supported by the lip in any way.

Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** 

**OVALS:** A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size


**EZ CLEAN CAST ACRYLIC** LIMITED LIFETIME WARRANTY




### **OPTIONAL FEATURES & ACCESSORIES**

(Please type in the box below)

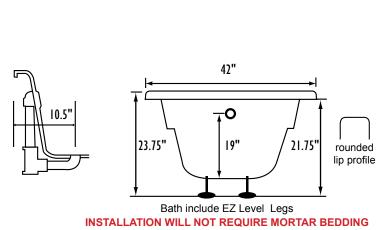



**Backrest angle** 



Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.