Zen Oval ZOAS7236SD 72" x 36" x 23"

PRODUCT NUMBER: ZOAS7236SD <u>.</u>

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	160 lbs
Gallons to Operate	77-102
ELECTRICAL SPECIFICATIO	NS
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Whisper Flo Heat System	(2) 115v 20AMP GFCI Circuit (opt.)

STANDARD FEATURES & ACCESSORIES for AIR SILVER SERIES BATHS _

JETS

12 Classic Air Jets Sidewall O

PUMPS

1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

PURITY

HydroCleanse

STANDARD ACCESSORIES

EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test

AIR SILVER SERIES

Jet & Control placement may vary

BATHERS: 2		
INSTALLATION		
•	DECK (D)	
•	UNDER MOUNT (U)	
	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	






REQUIREMENTS

Pump Locations: Select 1 Electrical: one 115v 20AMP GFCI Circuit Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:** OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

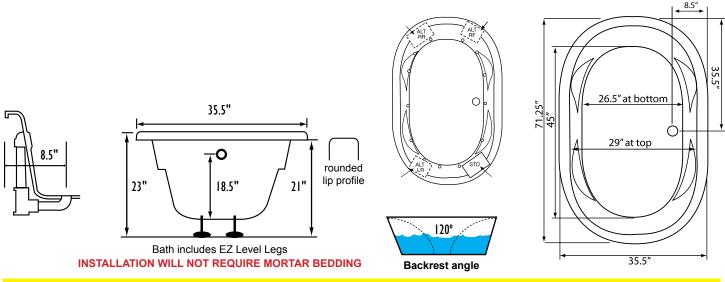

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.