Zen Oval ZOHG7236SD 72" x 36" x 23"

PRODUCT NUMBER: ZOHG7236SD

TECHNICAL SPECIFICATIONS	
Drain	Side drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	160 lbs
Gallons to Operate	77-102
ELECTRICAL SPECIFICATIO	NS
Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(1) 115v 20AMP GFCI Circuit

STANDARD FEATURES & ACCESSORIES for HYDRO GOLD SERIES BATHS____

JETS

PUMPS

3.25 Hydropower 3-speed Pump Quiet Pad Anti-Vibration Mounted Pump

HEATERS Stainless Steel Electric Heater

CONTROLS

Air Switch On/Off Control(s) For Hydro Pump & Mood Light 3 Speed Massage: High, Medium or Low

PURITY

HydroClean Water Purity System\ HydroCleanse

HYDRO GOLD SERIES

Jet & Control placement may vary



BATHERS: 2		
INSTALLATION		
•	DECK (D)	
•	UNDER MOUNT (U)	
	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	



STANDARD ACCESSORIES

Mood Light

Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome Deluxe Cushion Pillow EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test


REQUIREMENTS

Pump Locations: Select 1 Electrical: two 115v 20AMP GFCI Circuits Drain: Select Color / Finish Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY



OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

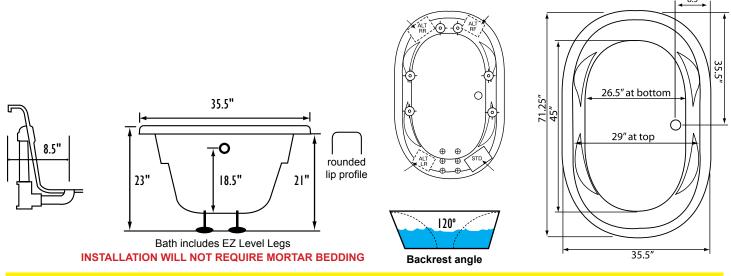

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.