# Zen Oval ZOCS7242 72" x 42" x 24"

PRODUCT NUMBER: ZOCS7242 🚨 🛈 🛈

TECHNICAL SPECIFICATIONS		
Drain	End drain	
Pump Location(s): Select 2	Std. = Standard / Alt LF/RF Optional	
Bath Weight (empty)	175 lbs	
Gallons to Operate	77-95	
ELECTRICAL SPECIFICATIONS		
Motor/Pump	(2) 115v 20AMP GFCI Circuits	
Inline Stainless Steel Heater	(Opt.) 115v 20AMP GFCI Circuit	

### STANDARD FEATURES & ACCESSORIES for COMBINATION SILVER SERIES BATHS \_

#### JETS

21 Air & Water Massage Jets Accumassage Back, Neck Jets Ultra Flow Jets -Micro Flow Jets ↔ Classic Air Jets O

#### PUMPS

2.25 Hydropower 1-speed Pump 1.0 Air Power 3-Speed Warm Air Pump Quiet Pad Anti-Vibration Mounted Pump

#### CONTROLS

Air Switch On/Off Control(s) Automatic Purge & Dry Cycle Control

#### PURITY

HydroClean Water Purity System HydroCleanse

## COMBINATION SILVER SERIES



BATHERS: 1		
IN	STALLATION	
•	DECK (D)	F
•	UNDER MOUNT (U)	
	ALCOVE (A)	
	FREESTANDING (F)	
	CLAWFOOT (L)	
	PEDESTAL (P)	

Jet & Control placement may vary



## STANDARD ACCESSORIES

Mood Light Lift & Turn Drain - White, Biscuit, Bone, Brushed Nickel, Oil Rubbed Bronze, Polished Chrome Deluxe Cushion Pillow EZ Level Adjustable Legs FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test


#### REQUIREMENTS

Pump Locations: Select 2 Electrical: two 115v 20AMP GFCI Circuits Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. CUT OUT DIMENSIONS: OVALS: A template will be provided RECTANGLES: Subtract 1" to 1.5" from length & width for hole

cut out size

EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY

#### OPTIONAL FEATURES & ACCESSORIES (Please type in the box below)

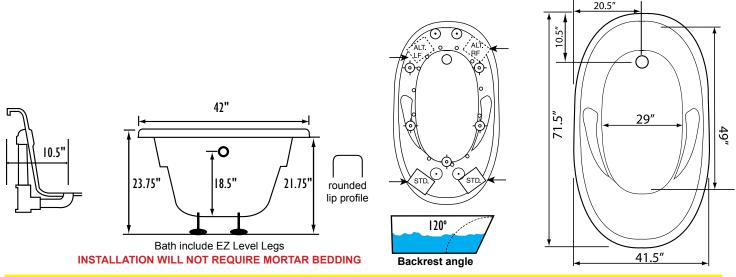

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.