Zen Oval ZOHS7242 72" x 42" x 24"

PRODUCT NUMBER: ZOHS7242 . 0 0

(1) 115v 20AMP GFCI Circuits (Opt) 115v 20AMP GFCI Circuit **HYDRO SILVER SERIES**



TECHNICAL SPECIFICATIONS	
Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	175 lbs
Gallons to Operate	77-95
ELECTRICAL SPECIFICATIONS	

BATHERS: 1	
INSTALLATION	
oxdot	DECK (D)
•	UNDER MOUNT (U)
	ALCOVE (A)
	FREESTANDING (F)
	CLAWFOOT (L)
	PEDESTAL (P)



STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS _

JETS

Motor/Pump

9 Water Jets Tri-Zone Back Systems 3 Jets Ultra Flow Jets - - -Micro Flow Jets (•)

Inline Stainless Steel Heater

PUMPS

2.25 Hydropower 1-speed Pump Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

PURITY

HydroClean Water Purity System HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily) 30 Point Quality Assurance Factory Test EZ Level Adjustable Legs

REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v 20AMP GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor. **CUT OUT DIMENSIONS:**

Jet & Control placement may vary

OVALS: A template will be provided

RECTANGLES: Subtract 1" to 1.5" from length & width for hole


cut out size


EZ CLEAN CAST ACRYLIC LIMITED LIFETIME WARRANTY




OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

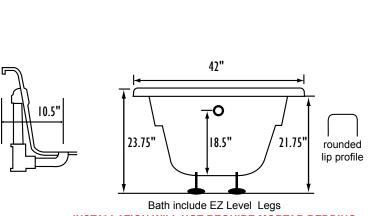





INSTALLATION WILL NOT REQUIRE MORTAR BEDDING

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are ± .25". All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.